




PNOC

Straight Fittings of flange type

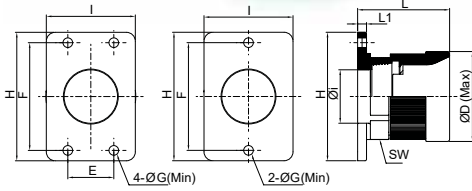

Specifications



Material	High Quality Polyamide 6	Degrees of Protection	IP 68 (EN 60529)
The max. Instantaneous Temperature	-40 °C to +105°C	Short Term	up to +150° C
Self-Extinguishing	UL94-HB / Free of Halogen Phosphorous and cadmium	Color	Black & Gray
Application	Machine tool, Shipbuilding, Tramway, Industrial / Automatic Machinery, Printing Machine etc. Pipe with connector.		


(Unit : mm)

Ordering No.		Tube Size	E	F	G	H	I	L1	L	Øi	ØD	SW
Black	Gray											
PNOC-12B	PNOC-12G	12	-	36.5	5.5	46	32	5	35.1	15	27.6	22.8
PNOC-16B	PNOC-16G	16	-	36.5	5.5	46	32	5	37	17.5	33	28
PNOC-22B	PNOC-22G	22	30.5	53.5	5.5	65	45	5	44.7	22	43	37.5
PNOC-28B	PNOC-28G	28	31	54.8	6.5	64.8	45	6	53.4	27	48.8	43
PNOC-36B	PNOC-36G	36	31	72.6	6.5	86.6	60	6	62	36	60.6	52.2
PNOC-48B	PNOC-48G	48	30.5	72.6	6.5	86.6	73	6	66.4	50	71.8	64



SPNC

Straight Fittings



Specifications



Material	High Quality Polyamide 6	Degrees of Protection	IP 68 (EN 60529)
The max. Instantaneous Temperature	-40 °C to +105°C	Short Term	up to +150° C
Self-Extinguishing	UL94-HB / Free of Halogen Phosphorous and cadmium	Color	Black & Gray
Application	Tramway Vehicle Construction etc		

(Unit : mm)

	Ordering No.		Thread	Tube Size	S	L 1	L	Øi	ØD	SW
	Black	Gray								
Pg Thread (DIN 40430)	SPNC-P09B	SPNC-P09G	Pg09	10	15.2	13	43.5	10	25	19.7
	SPNC-P11B	SPNC-P11G	Pg11	12	18.6	13	43.1	12	27.6	22.8
	SPNC-P132B	SPNC-P132G	Pg13.5	12	20.4	13	42	12	25	22.7
	SPNC-P136B	SPNC-P136G	Pg13.5	16	20.4	13	45	15.2	33	28
	SPNC-P16B	SPNC-P16G	Pg16	16	22.5	13	45	15.2	33	28
	SPNC-P21B	SPNC-P21G	Pg21	22	28.3	15	54.7	22	43	37.5
	SPNC-P29B	SPNC-P29G	Pg29	28	37	15	62.4	30.5	48.8	43
	SPNC-P36B	SPNC-P36G	Pg36	36	47	19	76.6	36	60.6	52.2
	SPNC-P48B	SPNC-P48G	Pg48	48	59.3	21	81.4	50	71.8	64
	Metric Thread (EN 60423)	SPNC-M10B	SPNC-M10G	M12 X 1.5	10	12	13	43.5	7.5	25
SPNC-M12B		SPNC-M12G	M16 X 1.5	12	16	13	43.1	12	27.6	22.8
SPNC-M16B		SPNC-M16G	M20 X 1.5	16	20	13	45	15.2	33	28
SPNC-M22B		SPNC-M22G	M25 X 1.5	22	25	15	54.7	20.6	43	37.5
SPNC-M28B		SPNC-M28G	M32 X 1.5	28	32	15	62.4	27	48.8	43
SPNC-M36B		SPNC-M36G	M40 X 1.5	36	40	19	76.6	34	60.6	52.2
SPNC-M48B		SPNC-M48G	M50 X 1.5	48	50	21	81.4	42	71.8	64