




# TTC

T Type Connector

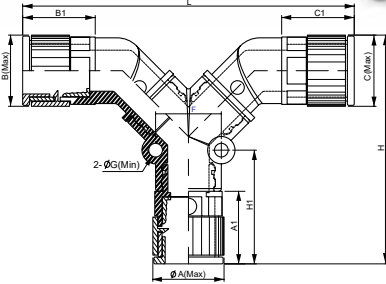

## Specifications

Material	High Quality Polyamide 6	Degrees of Protection	IP 68 (EN 60529)
The max. Instantaneous Temperature	-40 °C to +105°C	Short Term	up to +150° C
Self-Extinguishing	UL94-HB / Free of Halogen Phosphorous and cadmium	Color	Black & Gray
Application	CPS distributors guarantee elegant layout and save on cost instead of using distribution boxes. Nominal width from 28, reduceable to 10.		


(Unit : mm)

Ordering No.		A	B	C	ØA	A1	ØB	B1	ØC	C1	ØG	F	H1	H	L
Black	Gray														
TTC-101010B	TTC-101010G	10	10	10	23	26.6	23	24	23	24	5	24	41.6	81	114
TTC-121010B	TTC-121010G	12	10	10	25	26.5	23	24	23	24	5	24	41.5	81	114
TTC-121210B	TTC-121210G	12	12	10	25	26.5	25	24.4	23	24	5	24	41.5	83	118
TTC-121212B	TTC-121212G	12	12	12	25	26.5	25	24.4	25	24.4	5	24	41.5	83	120
TTC-161010B	TTC-161010G	16	10	10	30	28.5	23	24	23	24	5	24	43.5	82	114
TTC-161210B	TTC-161210G	16	12	10	30	28.5	25	24.4	23	24	5	24	43.5	85	118
TTC-161212B	TTC-161212G	16	12	12	30	28.5	25	24.4	25	24.4	5	24	43.5	85	120
TTC-161616B	TTC-161616G	16	16	16	30	28.5	30	26	30	26	5	24	43.5	90	124
TTC-222222B	TTC-222222G	22	22	22	41	33.3	41	33.5	41	33.5	5.6	39	48.2	110	156
TTC-282222B	TTC-282222G	28	22	22	47	39	41	33.5	41	33.5	5.6	39	53.9	116	156
TTC-282822B	TTC-282822G	28	28	22	47	39	47	39.5	41	33.5	5.6	39	53.9	120	165
TTC-282828B	TTC-282828G	28	28	28	47	39	47	39.5	47	39.5	5.6	39	53.9	120	174



# FEC

CPSFIX Series

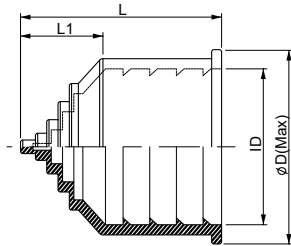

## Specifications

Material	N.B.R (Nitrile-Gutadiene Rubber)	Degrees of Protection	IP 66 (EN 60529)
Properties	Tube terminal, assembled by just putting on	Color	Black & Gray
For tube type	Corrugated tubes, type of CPSFLEX		

(Unit : mm)

Ordering No.		Tube Size	Min	Max	L1	L	ID	ØD
Black	Gray							
FEC-07B	FEC-07G	07	2	7	8	24	10	16
FEC-10B	FEC-10G	10	3	10	11	33	12.5	17
FEC-12B	FEC-12G	12	4.2	12	11	33	16	23.5
FEC-16B	FEC-16G	16	6	160	12.5	34.5	21.2	29
FEC-22B	FEC-22G	22	6	220	16	43	28.5	37
FEC-28B	FEC-28G	28	6	28	16	43	34.5	43
FEC-36B	FEC-36G	36	6	36	24	58.5	42.5	52
FEC-48B	FEC-48G	48	6	48.	24	58.5	54.5	64
FEC-56B	FEC-56G	56	9	56	29	71	67.2	76.7
FEC-70B	FEC-70G	70	10	70	36	86	82.5	92
FEC-95B	FEC-95G	95	13	95	45	110	106	115.5