




TWC IP67



- Black
- Gray

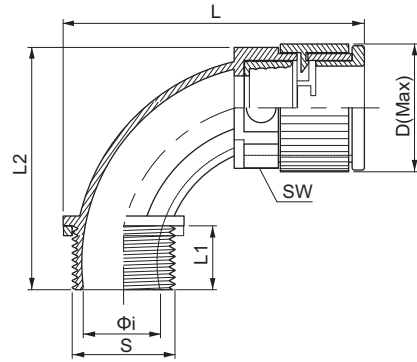

- G(PF)
- M
- Pg

- Material: High Quality Polyamide6
- Protective: IP 67 (EN 60529)
- Temperature Range: -40° C to + 105° C
- Short Term: up to +150° C
- Self-Extinguishing: UL94-HB
- Color: Black & Gray
- Application: Machine tool, Shipbuilding, Tramway Industrial / Automatic Machinery Printing Machine etc. Joint box with connector
- Certification:

PF Thread (JIS B0202)

(dimensions in mm)

Order No.										
Black	Gray	Thread PF	For tube size	S	L ₁	L ₂	L	Ø i	Ø d	SW
TWC-G10B	TWC-G10G	G1/2"	10	20.9	13	51	62	15.2	25	19.8
TWC-G12B	TWC-G12G	G1/2"	12	20.9	13	51	60	15.2	25	22.7
TWC-G16B	TWC-G16G	G1/2"	16	20.9	13	59	66	15.2	30	28
TWC-G22B	TWC-G22G	G3/4"	22	26.4	15	67	81	19.4	41	37.5
TWC-G28B	TWC-G28G	G1"	28	33.2	15	75	96	26.2	47	43
TWC-G368B	TWC-G368G	G1 1/4"	28	41.9	15	75	96	30	47	43
TWC-G36B	TWC-G36G	G1 1/4"	36	41.9	19	95	119	34.5	56	52.2
TWC-G42B	TWC-G42G	G1 1/2"	48	47.8	19	110	141	40.8	68	64.1
TWC-G48B	TWC-G48G	G2"	48	59.6	19	110	141	49.8	68	64.1

Metric Thread (EN 60423)

(dimensions in mm)

Order No.										
Black	Gray	Thread PF	For tube size	S	L ₁	L ₂	L	Ø i	ØD	SW
TWC-M107B	TWC-M107G	M12 X 1.5	07	12	11	31	41	9.3	17	14.2
TWC-M10B	TWC-M10G	M12 X 1.5	10	12	13	51	62	7.7	25	19.8
TWC-M12B	TWC-M12G	M16 X 1.5	12	16	13	51	60	12	25	22.7
TWC-M202B	TWC-M202G	M20 X 1.5	12	20	13	51	60	14.4	25	22.7
TWC-M16B	TWC-M16G	M20 X 1.5	16	20	13	59	66	15.2	30	28
TWC-M22B	TWC-M22G	M25 X 1.5	22	25	15	67	81	19.4	41	37.5
TWC-M28B	TWC-M28G	M32 X 1.5	28	32	15	75	96	26.2	47	43
TWC-M36B	TWC-M36G	M40 X 1.5	36	40	19	95	119	34.5	56	52.2
TWC-M48B	TWC-M48G	M50 X 1.5	48	50	19	110	141	44	68	64.1

Pg Thread (DIN 40430)

TWC-P077B	TWC-P077G	Pg07	07	12.5	11	31	41	9.5	17	14.2
TWC-P097B	TWC-P097G	Pg09	07	15.2	11	31	41	10.6	17	14.2
TWC-P09B	TWC-P09G	Pg09	10	15.2	13	51	62	10.6	25	19.8
TWC-P110B	TWC-P110G	Pg11	10	18.6	13	51	62	13.7	25	19.8
TWC-P130B	TWC-P130G	Pg13.5	10	20.4	13	51	62	15	25	19.8
TWC-P11B	TWC-P11G	Pg11	12	18.6	13	51	60	13.7	25	22.7
TWC-P132B	TWC-P132G	Pg13.5	12	20.4	13	51	60	15	25	22.7
TWC-P162B	TWC-P162G	Pg16	12	22.5	13	51	60	17.5	25	22.7
TWC-P136B	TWC-P136G	Pg13.5	16	20.4	13	59	66	15	30	28
TWC-P16B	TWC-P16G	Pg16	16	22.5	13	59	66	17.5	30	28
TWC-P163B	TWC-P163G	Pg16	22	22.5	15	67	81	17.5	41	37.5
TWC-P21B	TWC-P21G	Pg21	22	28.3	15	67	81	21.7	41	37.5
TWC-P29B	TWC-P29G	Pg29	28	37	15	75	96	30.5	47	43
TWC-P36B	TWC-P36G	Pg36	36	47	19	95	119	40.1	56	52.2
TWC-P48B	TWC-P48G	Pg48	48	59.3	19	110	141	51.8	68	64.1

